

Frame Size J (100-250) Amperes





Product description:

Complying to IEC 60947-2,
Maximum continuous Ampere rating at 55°C Voltage 240/415V,
Frequency 50/60Hz

| | |
|------------|-------------|
| Ue Maximum | 415V |
| Icu | 25/36/50 kA |
| Ics | 25/36/50 kA |
| Ui | 800V |
| Uimp | 8kV |


| Dimension: | H | W | D | Weight Kgs. |
|------------|-----|-----|----|-------------|
| 3Pole | 165 | 105 | 87 | 1.5 |
| 4Pole | | 140 | | 2.0 |

Marking

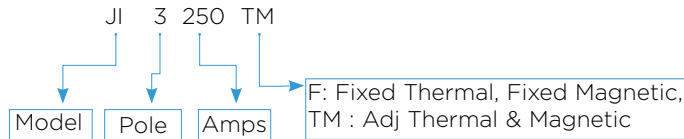


JI-Frame MCCB 25 kA AT 415V (Fixed Thermal & Magnetic) 55°C

| 25 kA | In (A) | 3 pole | | 4 pole | |
|-------|---------|----------|---------|----------|---------|
| | | Cat. No. | Ref.No. | Cat. No. | Ref.No. |
| | | 100A | JI3100F | W602568 | JI4100F |
| 125A | JI3125F | W602569 | JI4125F | W602574 | |
| 160A | JI3160F | W602570 | JI4160F | W602575 | |
| 200A | JI3200F | W602571 | JI4200F | W602576 | |
| 250A | JI3250F | W602572 | JI4250F | W602577 | |



JI-Frame MCCB 25 kA AT 415V (Adjustable Thermal & Magnetic) 55°C


| 25 kA | In (A) | 3 pole | | 4 pole | |
|-------|----------|----------|----------|----------|----------|
| | | Cat. No. | Ref.No. | Cat. No. | Ref.No. |
| | | 100A | JI3100TM | W602578 | JI4100TM |
| 125A | JI3125TM | W602579 | JI4125TM | W602584 | |
| 160A | JI3160TM | W602580 | JI4160TM | W602585 | |
| 200A | JI3200TM | W602581 | JI4200TM | W602586 | |
| 250A | JI3250TM | W602582 | JI4250TM | W602587 | |





JS-Frame MCCB 36 kA AT 415V (Fixed Thermal & Magnetic) 55°C


| 36 kA | In (A) | 3 pole | | 4 pole | |
|-------|---------|----------|---------|----------|---------|
| | | Cat. No. | Ref.No. | Cat. No. | Ref.No. |
| | | 100A | JS3100F | W608589 | JS4100F |
| 125A | JS3125F | W608590 | JS4125F | W608595 | |
| 160A | JS3160F | W608591 | JS4160F | W608596 | |
| 200A | JS3200F | W608592 | JS4200F | W608597 | |
| 250A | JS3250F | W608593 | JS4250F | W608598 | |

Frame Size J (100-250) Amperes

|  | JS-Frame MCCB 36 kA AT 415V (Adjustable Thermal & Magnetic) 55°C | | | | |
|---|--|----------|---------|----------|---------|
| | In (A) | 3 pole | | 4 pole | |
| | | Cat. No. | Ref.No. | Cat. No. | Ref.No. |
| 36 kA | 100A | JS3100TM | W602588 | JS4100TM | W602593 |
| | 125A | JS3125TM | W602589 | JS4125TM | W602594 |
| | 160A | JS3160TM | W602590 | JS4160TM | W602595 |
| | 200A | JS3200TM | W602591 | JS4200TM | W602596 |
| | 250A | JS3250TM | W602592 | JS4250TM | W602597 |

|  | JH-Frame MCCB 50 kA AT 415V (Fixed Thermal & Magnetic) 55°C | | | | |
|---|---|----------|---------|----------|---------|
| | In (A) | 3 pole | | 4 pole | |
| | | Cat. No. | Ref.No. | Cat. No. | Ref.No. |
| 50 kA | 100A | JH3100F | W608770 | JH4100F | W608775 |
| | 125A | JH3125F | W608771 | JH4125F | W608776 |
| | 160A | JH3160F | W608772 | JH4160F | W608777 |
| | 200A | JH3200F | W608773 | JH4200F | W608778 |
| | 250A | JH3250F | W608774 | JH4250F | W608779 |

|  | JH-Frame MCCB 50 kA AT 415V (Adjustable Thermal & Magnetic) 55°C | | | | |
|--|--|----------|---------|----------|---------|
| | In (A) | 3 pole | | 4 pole | |
| | | Cat. No. | Ref.No. | Cat. No. | Ref.No. |
| 50 kA | 100A | JH3100TM | W602598 | JH4100TM | W602603 |
| | 125A | JH3125TM | W602599 | JH4125TM | W602604 |
| | 160A | JH3160TM | W602600 | JH4160TM | W602605 |
| | 200A | JH3200TM | W602601 | JH4200TM | W602606 |
| | 250A | JH3250TM | W602602 | JH4250TM | W602607 |

|  | JIY-Frame MCCB (Non-Automatic) 55°C | | | | |
|---|-------------------------------------|----------|---------|----------|---------|
| | In (A) | 3 pole | | 4 pole | |
| | | Cat. No. | Ref.No. | Cat. No. | Ref.No. |
| | 100A | JIY3100 | W602758 | JIY4100 | W602763 |
| | 125A | JIY3125 | W602759 | JIY4125 | W602764 |
| | 160A | JIY3160 | W602760 | JIY4160 | W602765 |
| | 200A | JIY3200 | W602761 | JIY4200 | W602766 |
| | 250A | JIY3250 | W602762 | JIY4250 | W602767 |

Frame Size J (100-250) Amperes

Drawing

1

Moulded Case Circuit Breakers

