

Frame Size K (300-400) Amperes





Product description:

Complying to IEC 60947-2,
Maximum continuous Ampere rating at 55°C Voltage 240/415V,
Frequency 50/60Hz

Ue Maximum	415V
Icu	25/36/50 kA
Ics	25/36/50 kA
Ui	1000V
Uimp	12kV


Dimension:	H	W	D	Weight Kgs.
3Pole	257	140	111.7	5.7
4Pole		185		7.5

Marking
CE

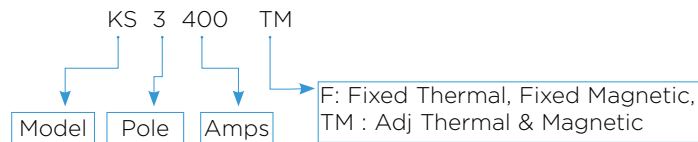


KI - Frame MCCB 25kA AT 415V (Fixed Thermal & Magnetic) 55°C

In (A)	3 pole		4 pole	
	Cat. No.	Ref.No.	Cat. No.	Ref.No.
300A	KI3300F	W610587	KI4300F	W610589
320A	KI3320F	W608783	KI4320F	W608785
350A	KI3350F	W610588	KI4350F	W610590
400A	KI3400F	W608784	KI4400F	W608786



KS - Frame MCCB 36kA AT 415V (Fixed Thermal & Magnetic) 55°C


In (A)	3 pole		4 pole	
	Cat. No.	Ref.No.	Cat. No.	Ref.No.
300A	KS3300F	W610553	KS4300F	W610555
320A	KS3320F	W602608	KS4320F	W602610
350A	KS3350F	W610554	KS4350F	W610556
400A	KS3400F	W602609	KS4400F	W602611



KS - Frame MCCB 36kA AT 415V (Adjustable Thermal & Magnetic) 55°C


In (A)	3 pole		4 pole	
	Cat. No.	Ref.No.	Cat. No.	Ref.No.
300A	KS3300TM	W610557	KS4300TM	W610559
320A	KS3320TM	W602612	KS4320TM	W602614
350A	KS3350TM	W610558	KS4350TM	W610560
400A	KS3400TM	W602613	KS4400TM	W602615

Frame Size K (300-400) Amperes



KH - Frame MCCB 50kA AT 415V (Adjustable Thermal & Magnetic) 55°C

50 kA	In (A)	3 pole		4 pole	
		Cat. No.	Ref.No.	Cat. No.	Ref.No.
		300A	KH3300TM	W610561	KH4300TM
320A	KH3320TM	W602616	KH4320TM	W602618	
350A	KH3350TM	W610562	KH4350TM	W610564	
400A	KH3400TM	W602617	KH4400TM	W602619	



KSY - Frame MCCB (Non-Automatic) 55°C

50 kA	In (A)	3 pole		4 pole	
		Cat. No.	Ref.No.	Cat. No.	Ref.No.
		300A	KSY3300	W610565	KSY4300
320A	KSY3320	W602620	KSY4320	W602622	
350A	KSY3350	W610566	KSY4350	W610568	
400A	KSY3400	W602621	KSY4400	W602623	

Frame Size K (300-400) Amperes

Drawing

