

# Frame Size JI (100-250) Amperes





## Product description:

Complying to IEC 60947-2,  
Maximum continuous Ampere rating at 40°C Voltage 240/415V,  
Frequency 50/60Hz

Ue Maximum	415V
Icu	25 kA
Ics	25 kA
Ui	800V
Uimp	8kV


Dimension:	H	W	D	Weight Kgs.
3Pole	165	105	77	1.8
4Pole		140		2.4

## Marking

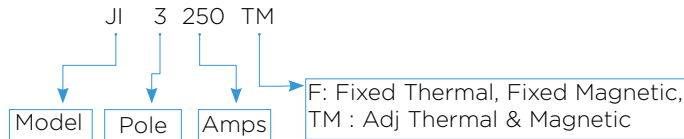


JI-Frame MCCB 25 kA AT 415V (Fixed Thermal & Magnetic) 40°C

25 kA	In (A)	3 pole		4 pole	
		Cat. No.	Ref.No.	Cat. No.	Ref.No.
		100A	JI3100DDF	W613334	JI4100DF
125A	JIS3125DF	W613335	JI4125DF	W613340	
160A	JIS3160DF	W613336	JI4160DF	W613341	
200A	JIS3200DF	W613337	JI4200DF	W613342	
250A	JIS3250DF	W613338	JI4250DF	W613343	



JI-Frame MCCB 25 kA AT 415V (Adjustable Thermal & Magnetic) 40°C

25 kA	In (A)	3 pole		4 pole	
		Cat. No.	Ref.No.	Cat. No.	Ref.No.
		100A	JI3100DTM	W613344	JI4100DTM
125A	JI3125DTM	W613345	JI4125DTM	W613350	
160A	JI3160DTM	W613346	JI4160DTM	W613351	
200A	JI3200DTM	W613347	JI4200DTM	W613352	
250A	JI3250DTM	W613348	JI4250DTM	W613353	



JIY-Frame MCCB (Non-Automatic) 40°C (IEC 60947-3)

	In (A)	3 pole		4 pole	
		Cat. No.	Ref.No.	Cat. No.	Ref.No.
		100A	JIY3100D	W613354	JIY4100D
125A	JIY3125D	W613355	JIY4125D	W613360	
160A	JIY3160D	W613356	JIY4160D	W613361	
200A	JIY3200D	W613357	JIY4200D	W613362	
250A	JIY3250D	W613358	JIY4250D	W613363	

# Frame Size JI (100-250) Amperes

Drawing

