

Frame Size K (500-630) Amperes




Product description:

Complying to IEC 60947-2,
Maximum continuous Ampere rating at 40°C Voltage 240/415V,
Frequency 50/60Hz

Ue Maximum	415V
Icu	36/50/100 kA
Ics	36/50/100 kA
Ui	1000V
Uimp	12kV

Dimension:	H	W	D	Weight Kgs.
3Pole	257	140	108	4.3
4Pole		185		5.8



Marking
CE

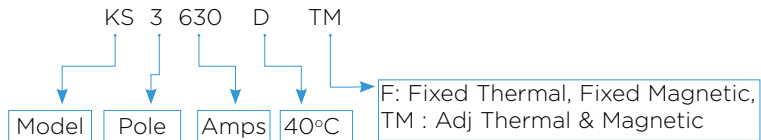

KS - Frame MCCB 36kA AT 415V (Fixed Thermal & Magnetic) 40°C						
	36 kA	In (A)	3 pole		4 pole	
			Cat. No.	Ref.No.	Cat. No.	Ref.No.
		500A	KS3500DF	W612786	KS4500DF	W612788
		630A	KS3630DF	W612787	KS4630DF	W612789
KS - Frame MCCB 36kA AT 415V (Adjustable Thermal & Magnetic) 40°C						
	36 kA	In (A)	3 pole		4 pole	
			Cat. No.	Ref.No.	Cat. No.	Ref.No.
		500A	KS3500DTM	W612790	KS4500DTM	W612792
		630A	KS3630DTM	W612791	KS4630DTM	W612793
KH - Frame MCCB 50kA AT 415V (Adjustable Thermal & Magnetic) 40°C						
	50 kA	In (A)	3 pole		4 pole	
			Cat. No.	Ref.No.	Cat. No.	Ref.No.
		500A	KH3500DTM	W612794	KH4500DTM	W612796
		630A	KH3630DTM	W612795	KH4630DTM	W612797
KN - Frame MCCB 100kA AT 415V (Adjustable Thermal & Magnetic) 40°C						
	100 kA	In (A)	3 pole		4 pole	
			Cat. No.	Ref.No.	Cat. No.	Ref.No.
		500A	KN3500DTM	W612798	KN4500DTM	W612800
		630A	KN3630DTM	W612799	KN4630DTM	W612801
KNY - Frame MCCB (Non-Automatic) 40°C (IEC 60947-3)						
	In (A)	3 pole		4 pole		
		Cat. No.	Ref.No.	Cat. No.	Ref.No.	
		500A	KNY3500D	W612802	KNY4500D	W612804
		630A	KNY3630D	W612803	KNY4630D	W612805

Frame Size K (500-630) Amperes

Drawing

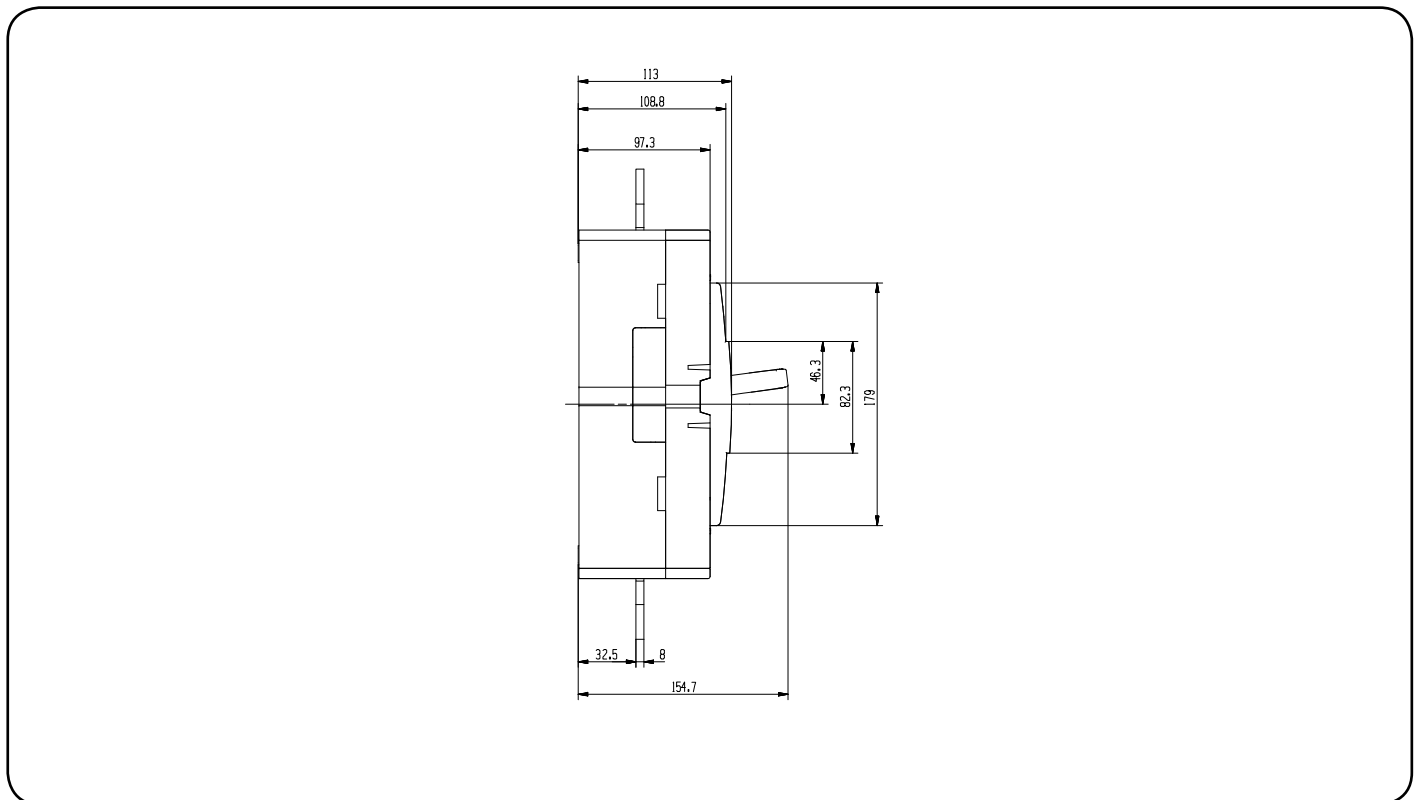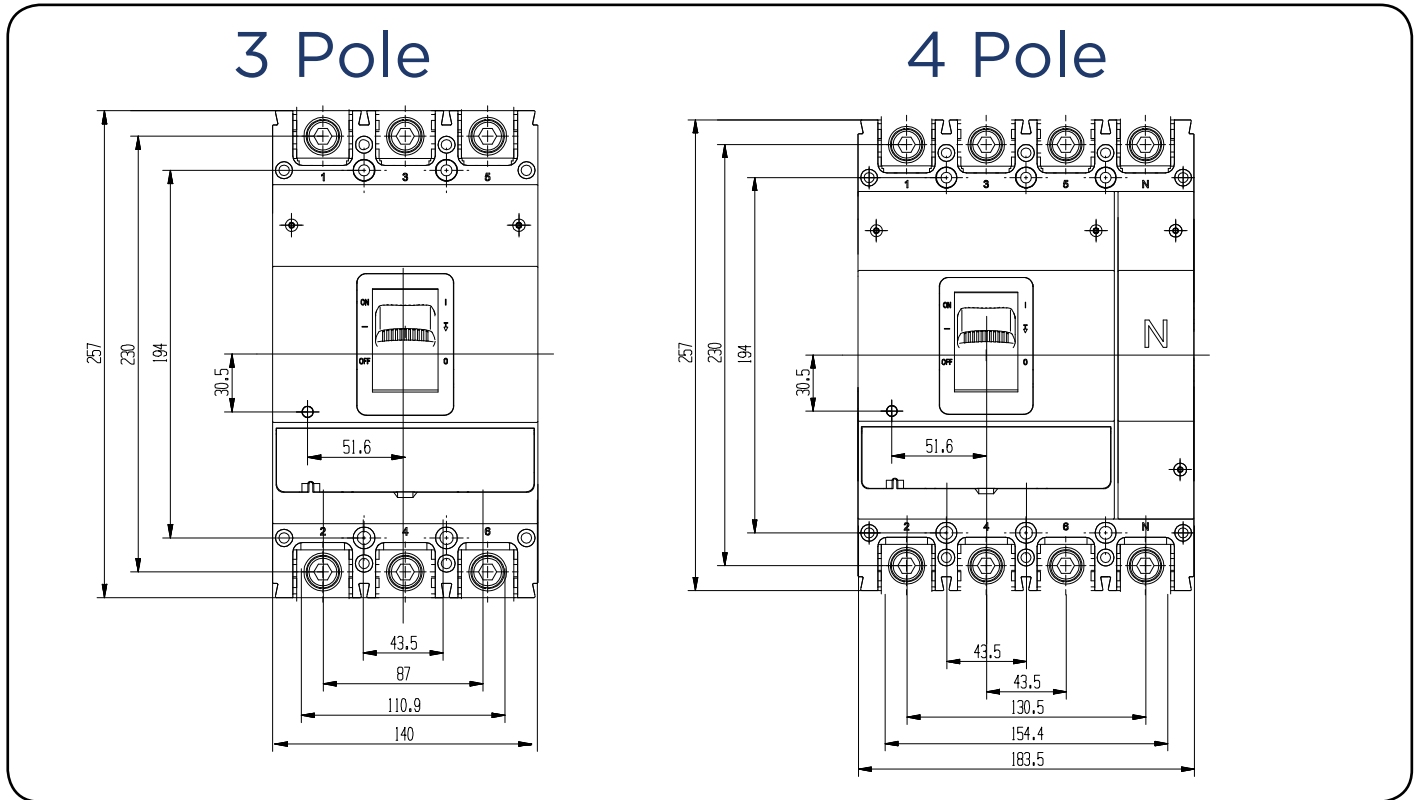

1
Moulded Case Circuit Breakers