

Frame Size L (500-800) Amperes

1





Product description:

Complying to IEC 60947-2,
Maximum continuous Ampere rating at 40°C Voltage 240/415V,
Frequency 50/60Hz

Ue Maximum	415V
Icu	70 kA
Ics	50 kA
Ui	1000V
Uimp	12kV


Dimension:	H	W	D	Weight Kgs.
3Pole	275	210	114	9.5
4Pole		280		12.5

Marking

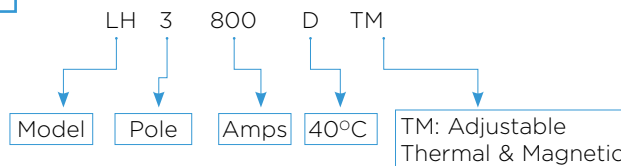

LH - Frame MCCB 70/50kA AT 415V (Adjustable Thermal & Magnetic) 40°C

70/50 kA	In (A)	3 pole		4 pole	
		Cat. No.	Ref.No.	Cat. No.	Ref.No.
	500A	LH3500DTM	W612806	LH4500DTM	W612809
	630A	LH3630DTM	W612807	LH4630DTM	W612810
	800A	LH3800DTM	W612808	LH4800DTM	W612811





LHY - Frame MCCB (Non-Automatic) 40°C (IEC 60947-3)

	In (A)	3 pole		4 pole	
		Cat. No.	Ref.No.	Cat. No.	Ref.No.
	500A	LHY3500D	W612812	LHY4500D	W612815
	630A	LHY3630D	W612813	LHY4630D	W612816
	800A	LHY3800D	W612814	LHY4800D	W612817

Frame Size L (500-800) Amperes

Drawing

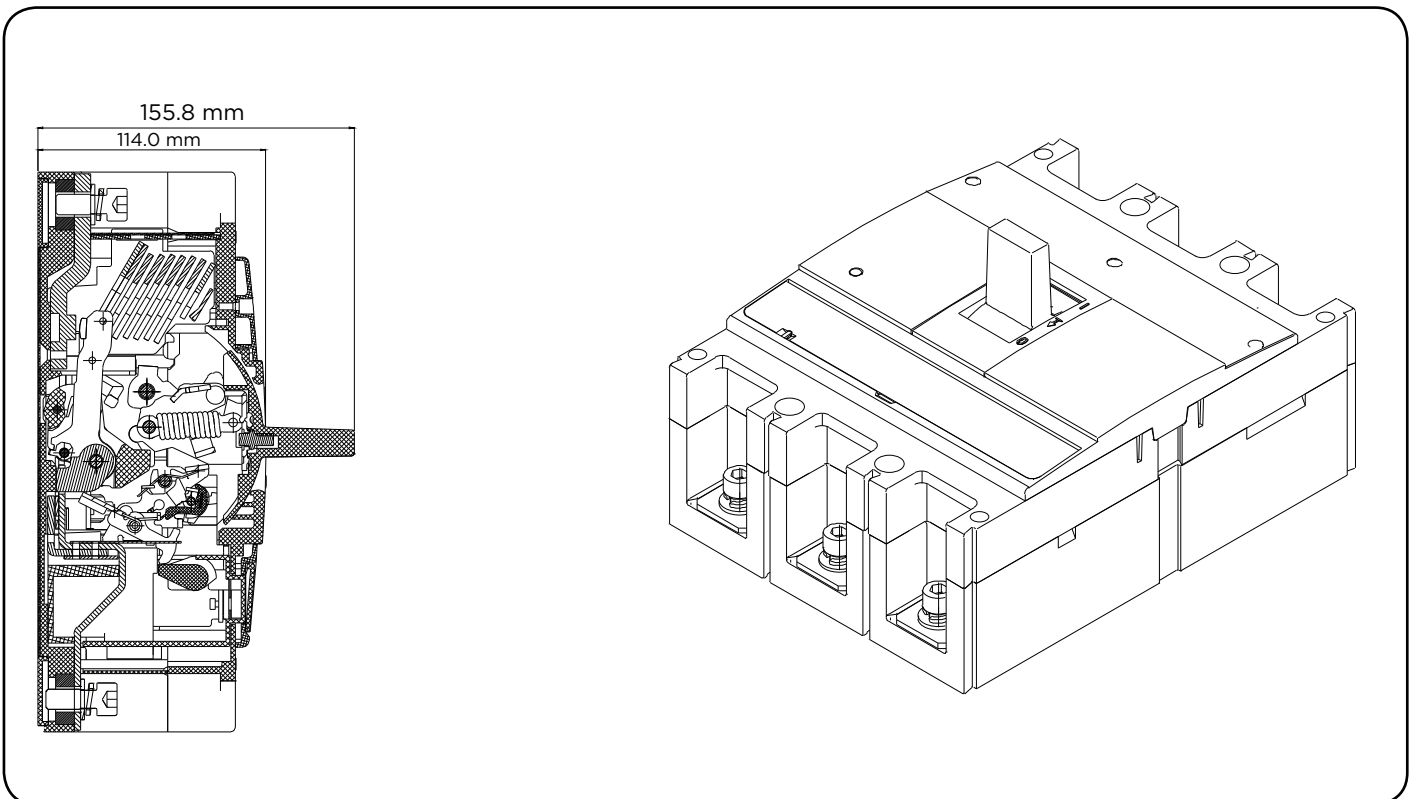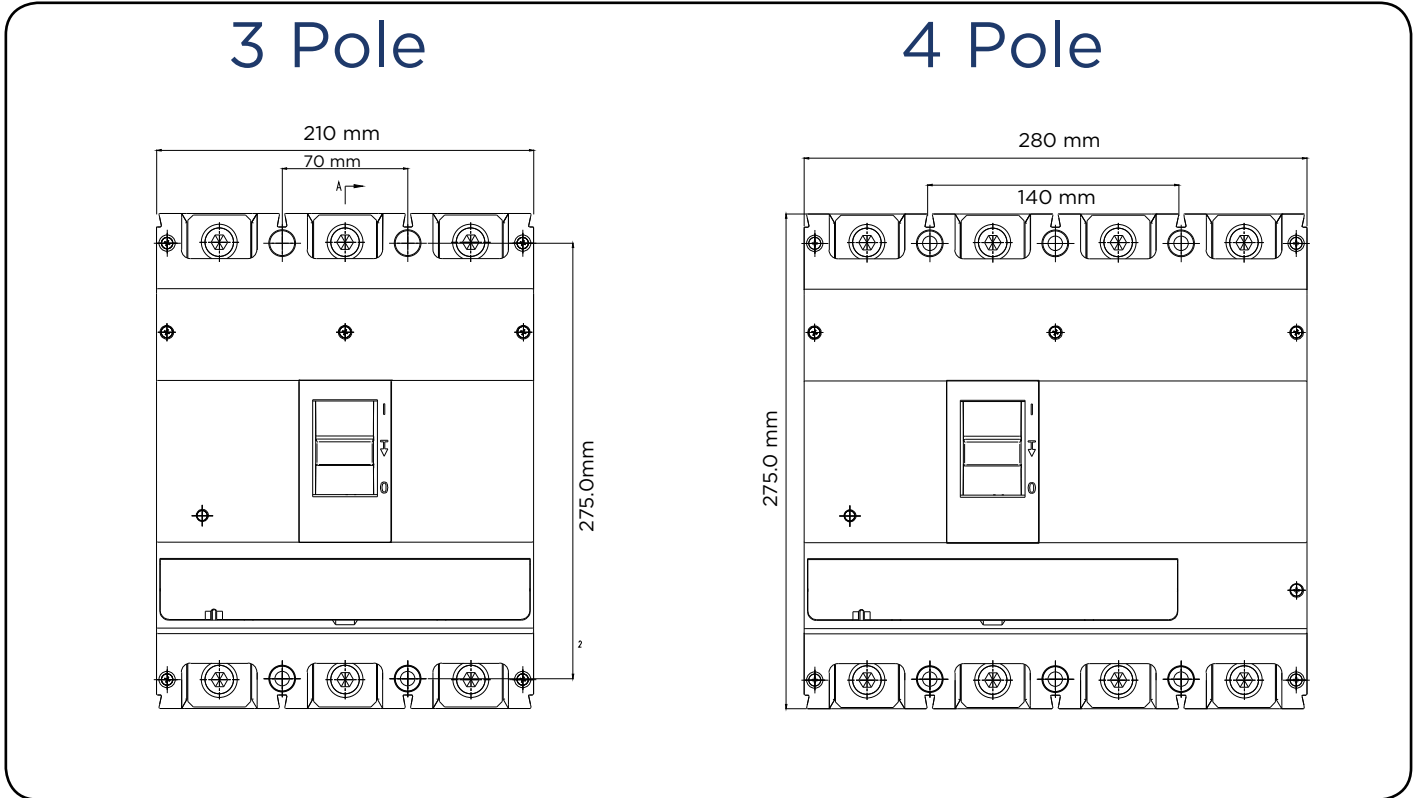

1
Moulded Case Circuit Breakers