

Frame Size K (500-630) Amperes




Product description:

Complying to IEC 60947-2,
Maximum continuous Ampere rating at 55°C Voltage 240/415V,
Frequency 50/60Hz

Ue Maximum	415V
Icu	25/36/50 kA
Ics	25/36/50 kA
Ui	1000V
Uimp	12kV

Dimension:	H	W	D	Weight Kgs.
3Pole	257	140	111.7	5.7
4Pole		185		7.5


Marking
CE

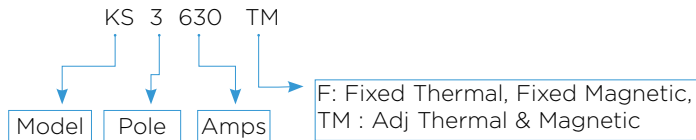

	KI - Frame MCCB 25kA AT 415V (Fixed Thermal & Magnetic) 55°C					
	25 kA	In (A)	3 pole		4 pole	
			Cat. No.	Ref.No.	Cat. No.	Ref.No.
		500A	KI3500F	W608787	KI4500F	W608789
630A	KI3630F	W608788	KI4630F	W608790		
	KS - Frame MCCB 36kA AT 415V (Fixed Thermal & Magnetic) 55°C					
	36 kA	In (A)	3 pole		4 pole	
			Cat. No.	Ref.No.	Cat. No.	Ref.No.
		500A	KS3500F	W602624	KS4500F	W602626
630A	KS3630F	W602625	KS4630F	W602627		
	KS - Frame MCCB 36kA AT 415V (Adjustable Thermal & Magnetic) 55°C					
	36 kA	In (A)	3 pole		4 pole	
			Cat. No.	Ref.No.	Cat. No.	Ref.No.
		500A	KS3500TM	W602628	KS4500TM	W602630
630A	KS3630TM	W602629	KS4630TM	W602631		
	KH - Frame MCCB 50kA AT 415V (Adjustable Thermal & Magnetic) 55°C					
	50 kA	In (A)	3 pole		4 pole	
			Cat. No.	Ref.No.	Cat. No.	Ref.No.
		500A	KH3500TM	W602632	KH4500TM	W602634
630A	KH3630TM	W602633	KH4630TM	W602635		
	KSY - Frame MCCB (Non-Automatic) 55°C					
	In (A)	3 pole		4 pole		
		Cat. No.	Ref.No.	Cat. No.	Ref.No.	
		500A	KSY3500	W602636	KSY4500	W602638
630A	KSY3630	W602637	KSY4630	W602639		

Frame Size K (500-630) Amperes

Drawing

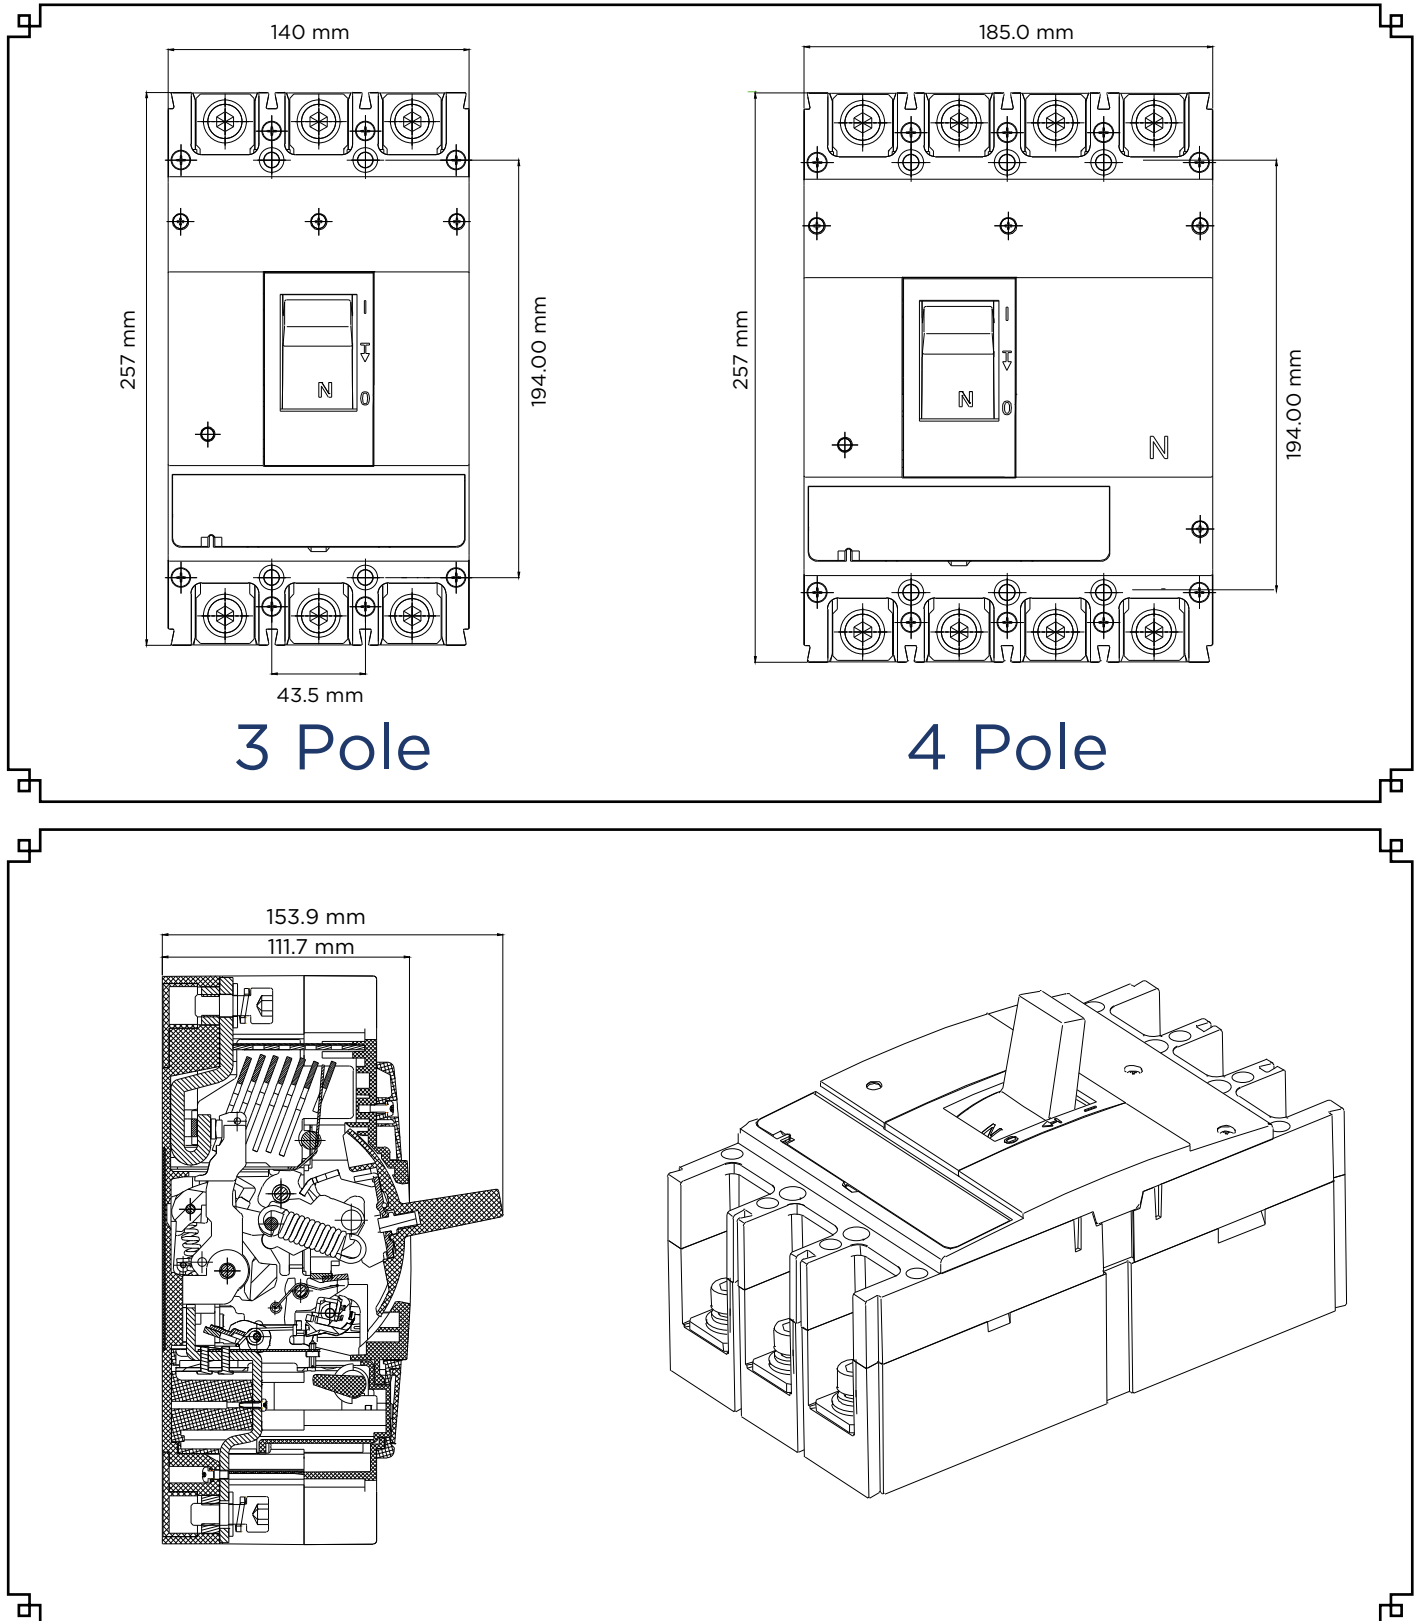

3 Pole

4 Pole

1 Moulded Case Circuit Breakers